RevNo	Revision note	Date	Signature	Checked

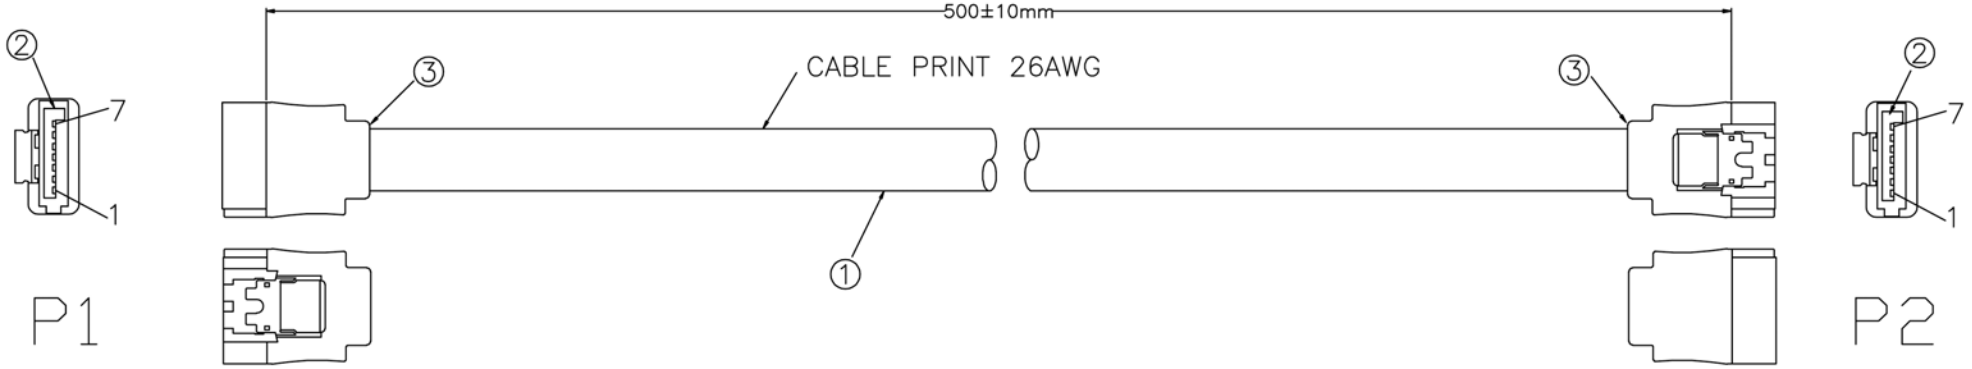

PIN OUT

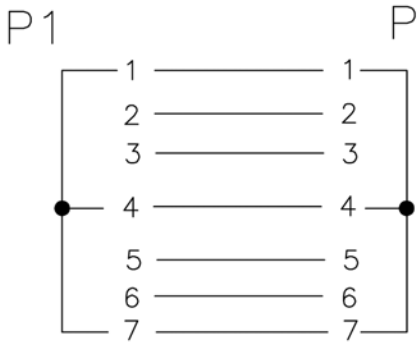

REQUIREMENTS:

1:100% short and open testing.

2:Test conditions
DC300V /10MS
Insulation resistance 10MΩ(Min)
Conduction resistance 5Ω(Max)

NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT
③	MOLDED	BLACK 45P PVC	0.003	KG
②	CONNECTOR	SATA 7PIN FEMALE WITH SHRAPNAL,SHORT BLOCK	2	PCS
①	CABLE	SATA CABLE:UL2725(26AWG*2F+AL)*2C+3D OD:2.2*7.6MM,DARK RED JACKET	0.5	M

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by		Checked by	Approved by - date MARCH 4.2012	File name SATA 7P/F-7P/F WITH SHRAPNAL,L=0.5M	Date MARCH 4.2012	Scale FREE
					26-1009	
					26-1009	Edition 1 / Sheet 1/2